

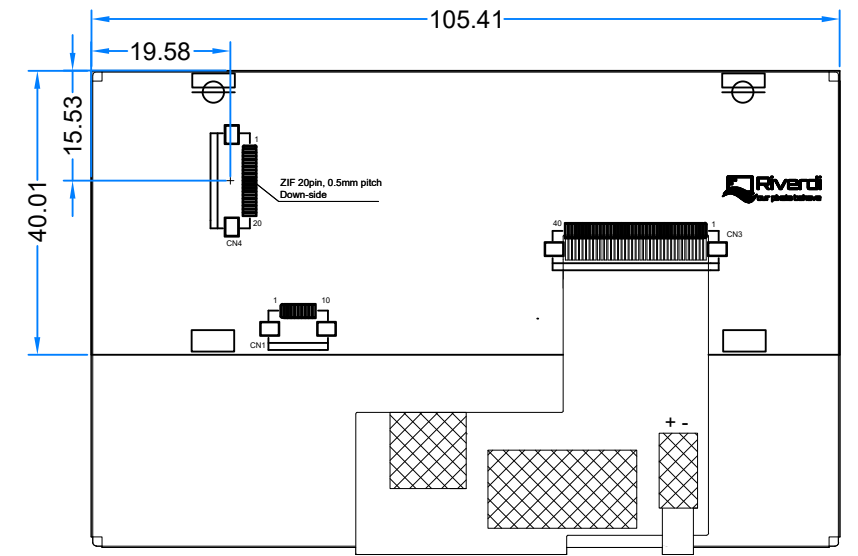
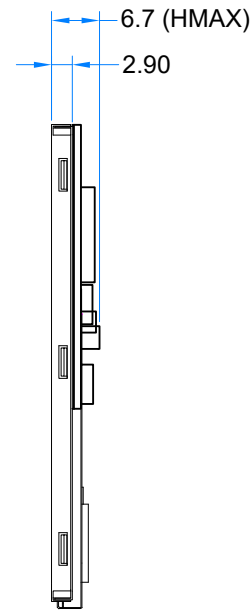



PIN	DESC
1	VDD
2	GND
3	SPI_SCLK/ I2C_SCL
4	MISO/I2C_SDA
5	MOSI/I2C_SA0
6	CS/I2C_SA1
7	INT
8	PD
9	MODE
10	AUDIO_OUT
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	BLVDD
18	BLVDD
19	BLGND
20	BLGND

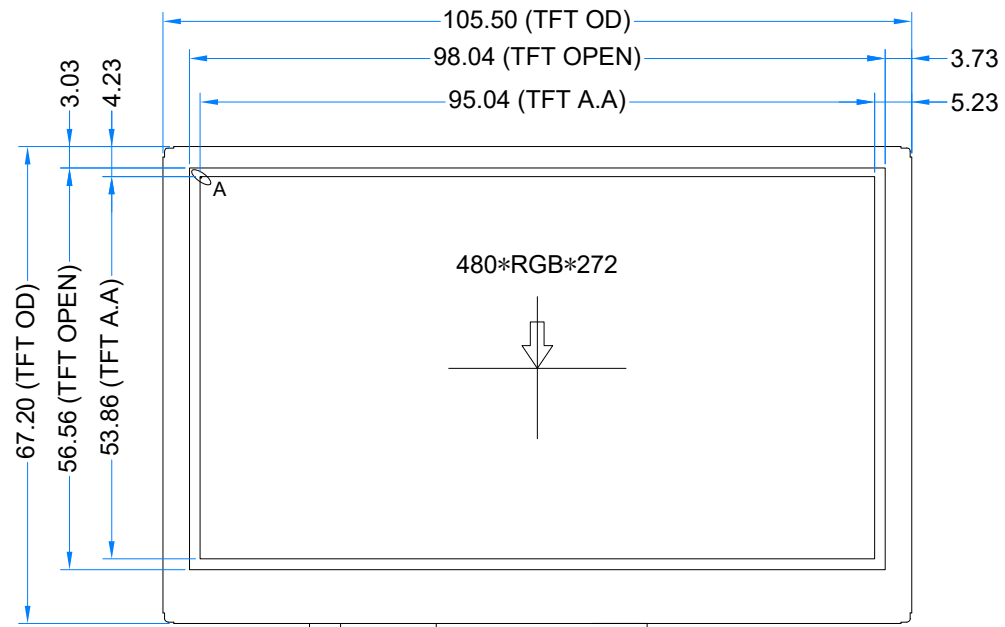

SCALE A 60:1



INTERNAL BACKLIGHT LED CONNECTION

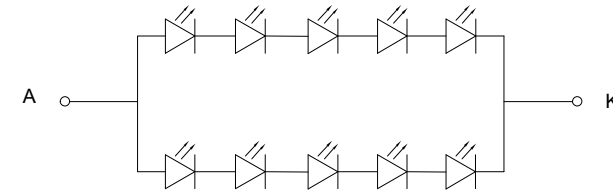

NOTES:

- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
- OPERATION VOLTAGE: VDD=3.3V
- VIEWING DIRECTION: 12 O'CLOCK
- IC CONTROLLER: FT800
- OPERATING TEMP.: -20°C ~ 70°C
- STORAGE TEMP.: -30°C ~ 80°C
- LED BACKLIGHT: 10-LED WHITE, BUILT-IN INVERTER
- SURFACE LUMINANCE: 550 cd/m²
- GENERAL TOLERANCE: ±0.2
- RoHS COMPLIANT

1.2	Update thickness	2015.02.23
1.1	Update dimensions	2014.11.12
1.0	Initial case	2014.05.16
Ver.	DESCRIPTION	DATE

CUSTOMER APVL		DATE	2015/02/23	
DRAWN	SCALE	TITLE		
DFTG CHK	UNIT	RVT4.3B480272CNWN00		
ENGR CHK	mm	MODEL		
APPROVAL		DWG NO		
		Rev.1.2		PAGE
				1/1