




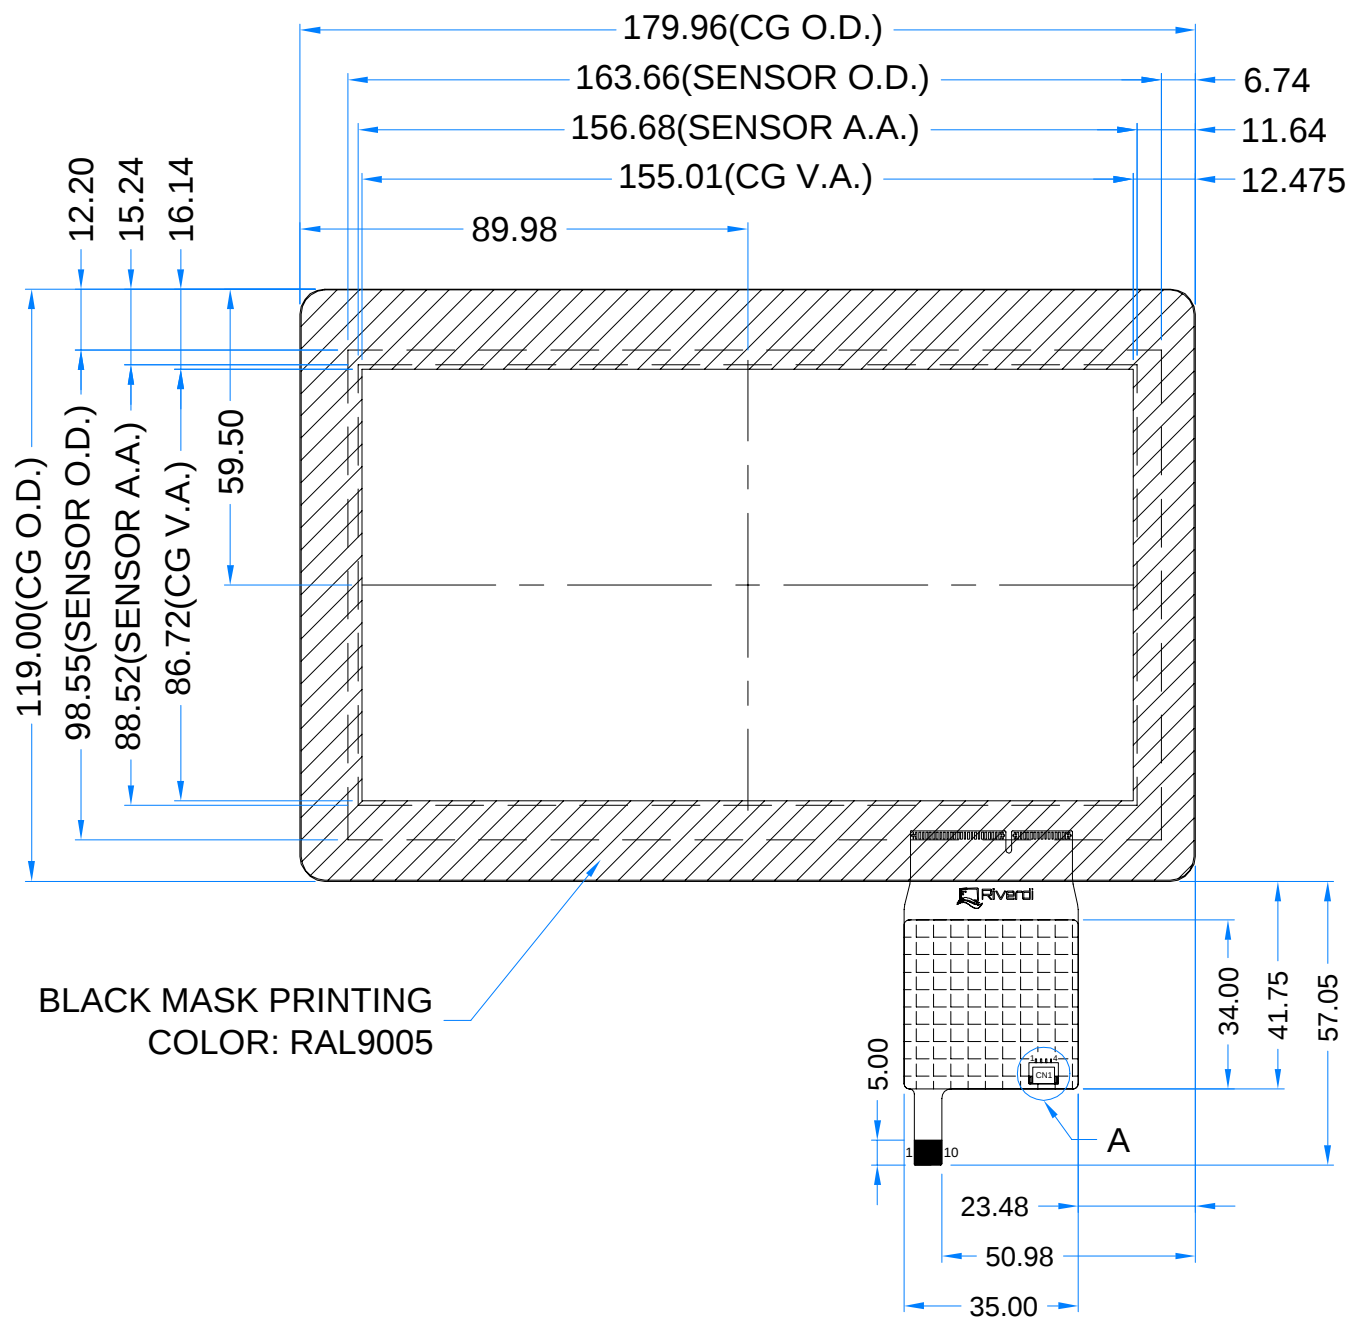


DETAIL A
SCALE 4:1

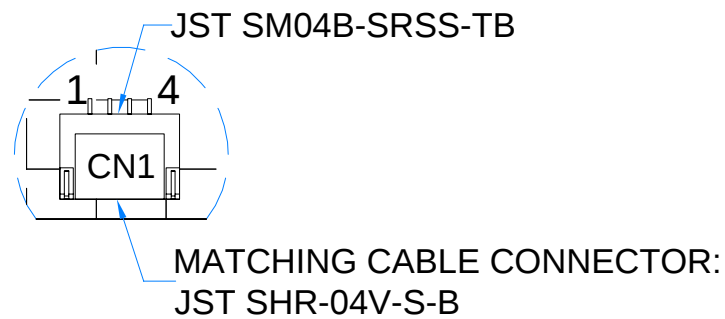

DETAIL B
SCALE 4:1




DETAIL C
SCALE 2:1

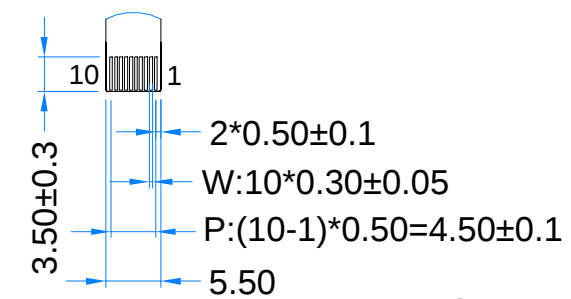

PINOUT ON THE 2ND PAGE

Revision:	Changes:	Date:
1.0	Initial Case	2020.08.18

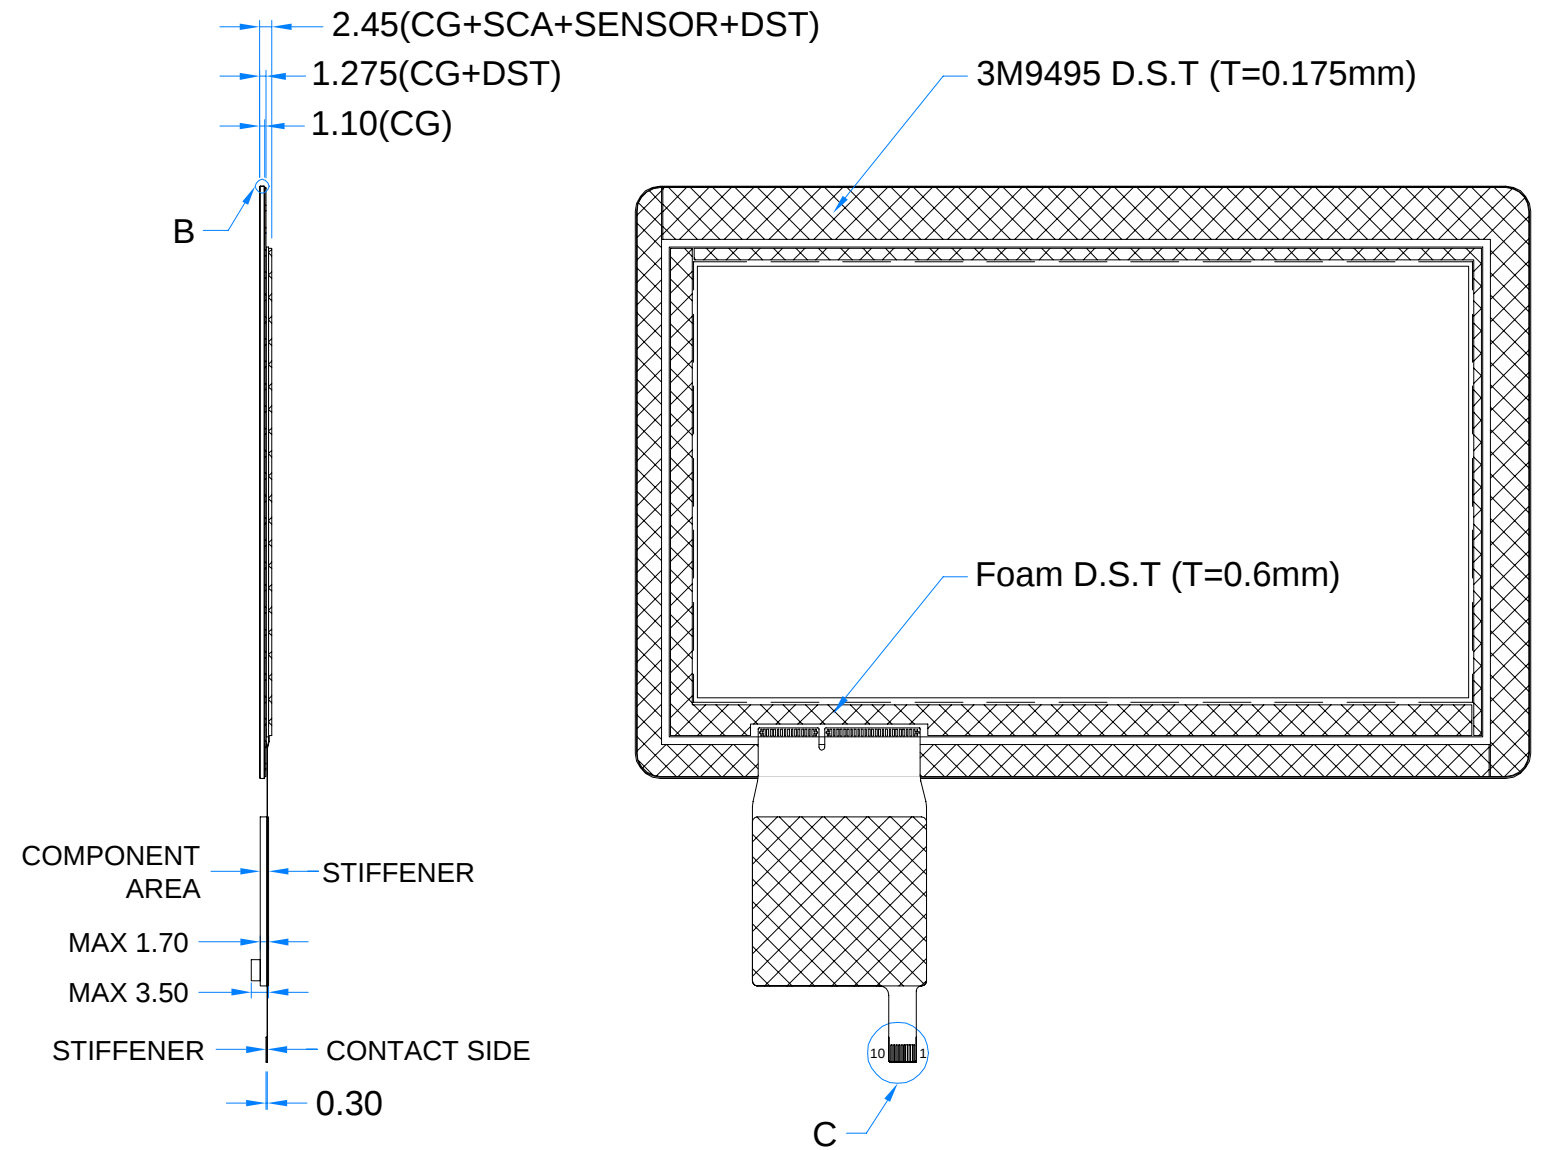

TP NOTES:
 1. TP STRUCTURE: G+G
 2. CG THICKNESS: 1.10mm
 3. SURFACE HARDNESS: 7H
 4. DRIVER IC: ILI2132A
 5. INTERFACE: USB; I2C; OPTIONAL UART
 6. OPERATING VOLTAGE: 3.3V(CTP I2C); 5.0V(CTP USB);

GENERAL NOTES:
 1. OPERATING TEMPERATURE: -20°C ~ 70°C
 2. STORAGE TEMPERATURE: -30°C ~ 80°C
 3. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm
 4. RoHS COMPLIANT

PN: RVCTP70UI00

SN:

DRAWN: M.Natywa

CHECKED: Carol Gao

APPR:




2020.08.18

1:1.52

[mm]

ISO A3



P. 1 of 1



TOUCH PANNEL CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	USB_GND	6	I2C_VDD(3.3V)
2	USB_VDD(5.0V)	7	I2C_RST
3	USB_D-	8	I2C_SCL
4	USB_D+	9	I2C_INT
5	I2C_GND	10	I2C_SDA/TXD

CN1			
Pin No.	Desc.	Pin No.	Desc.
1	USB_VDD(5.0V)	3	USB_D+
2	USB_D-	4	USB_GND