

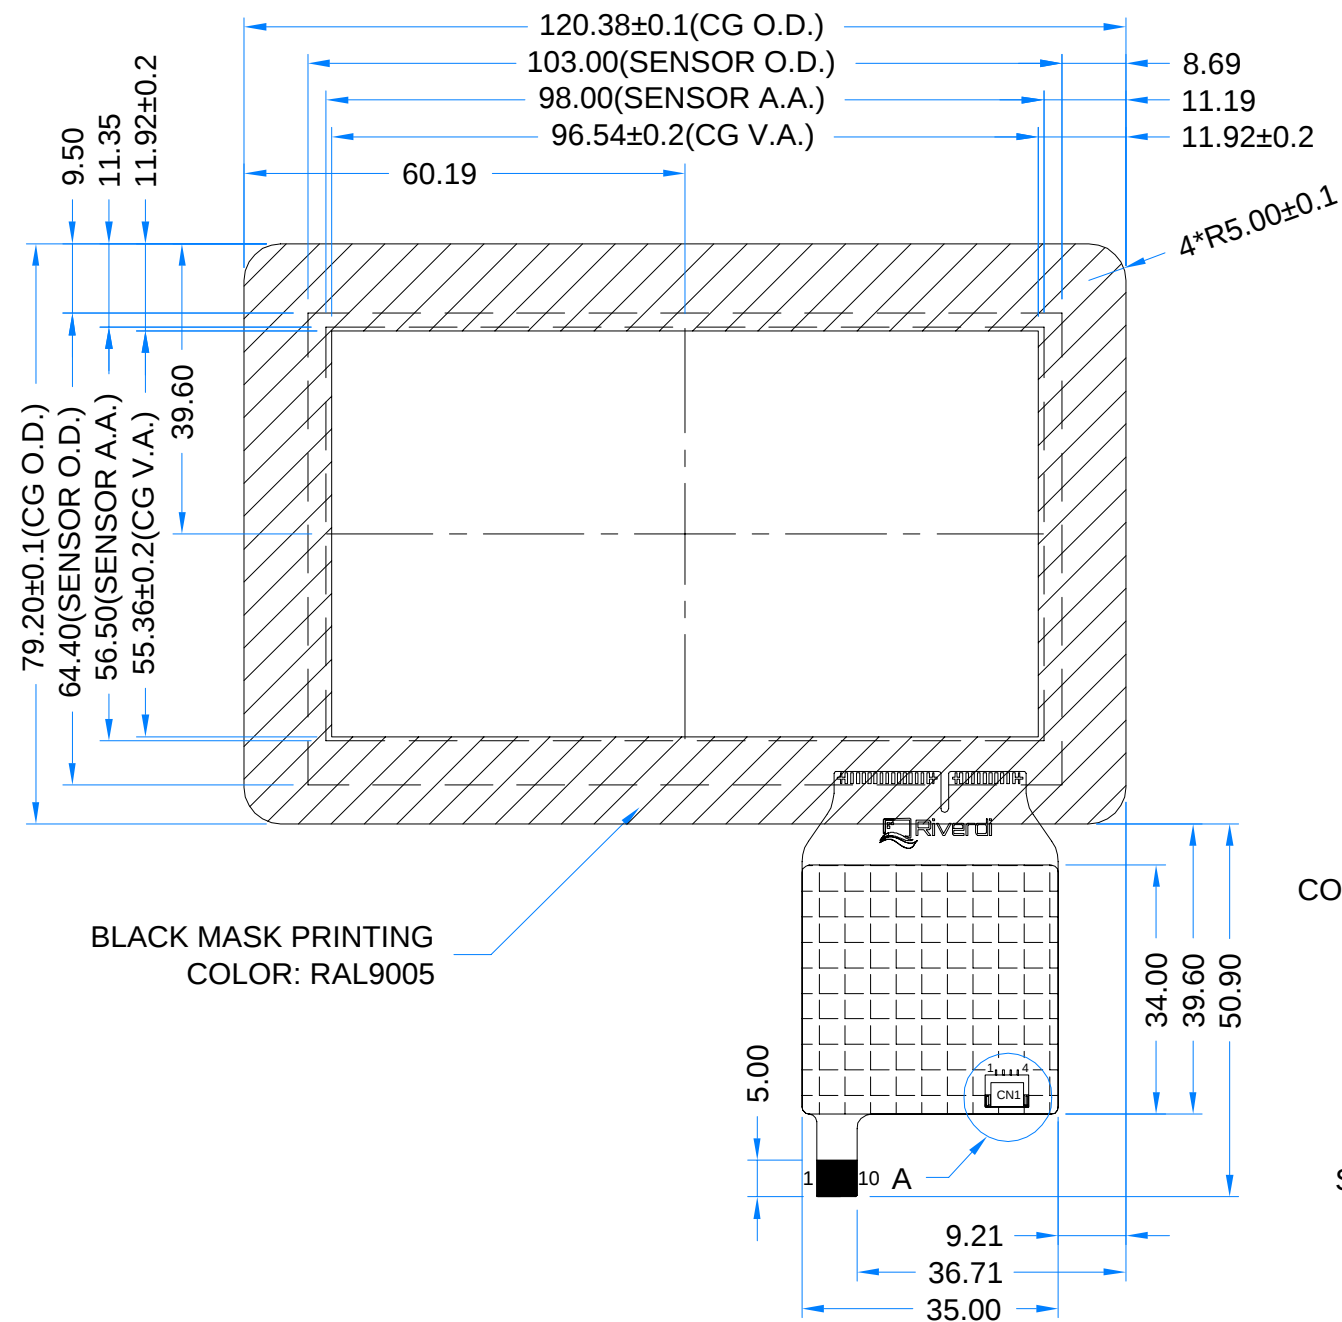
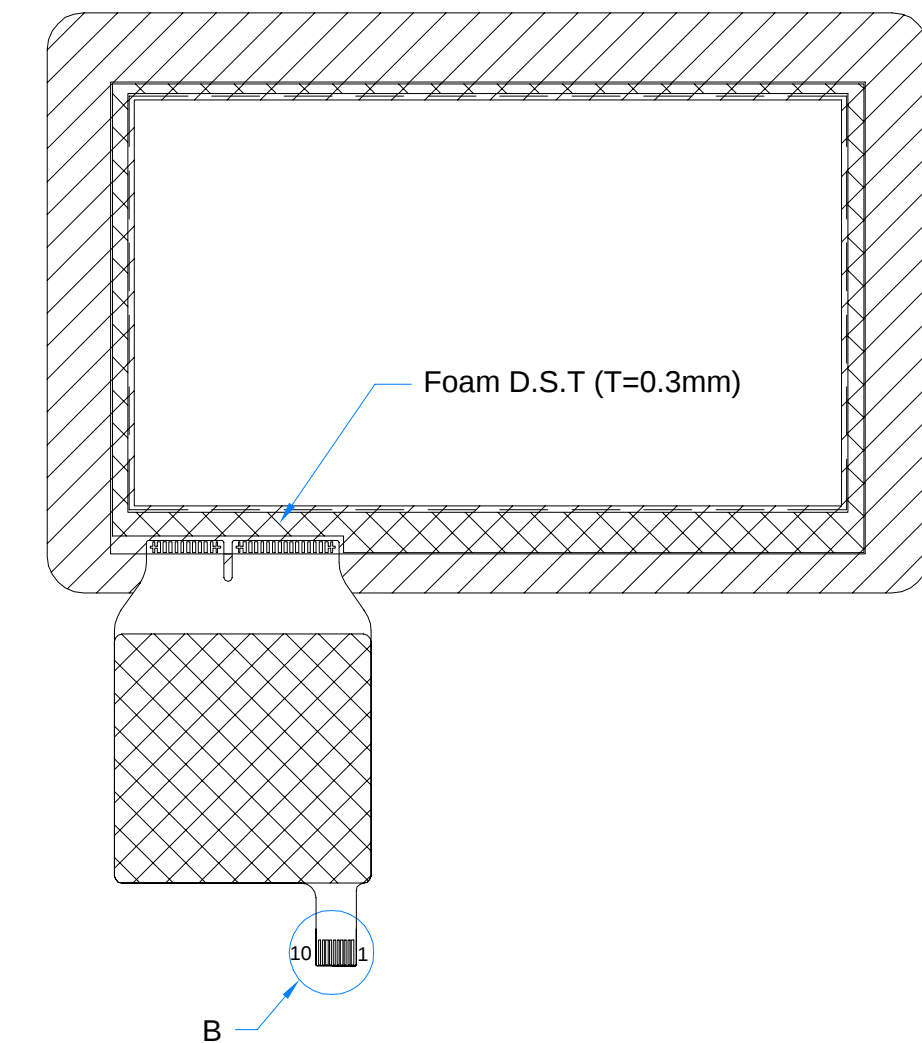



Revision:	Changes:	Date:
1.0	Initial Case	2020.08.19

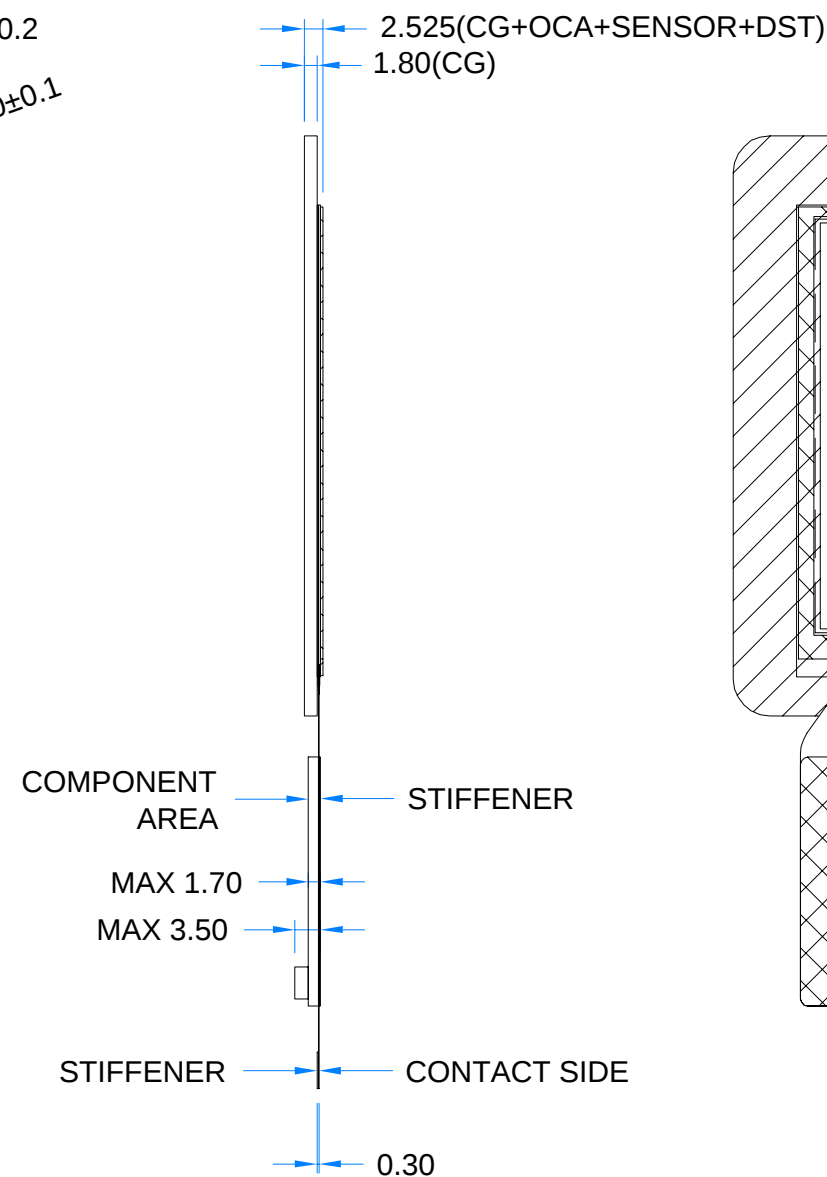

DETAIL A
SCALE 4:1

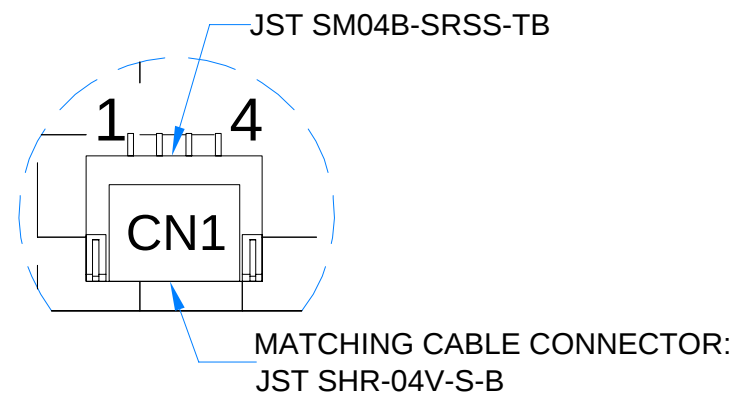

DETAIL B
SCALE 2:1

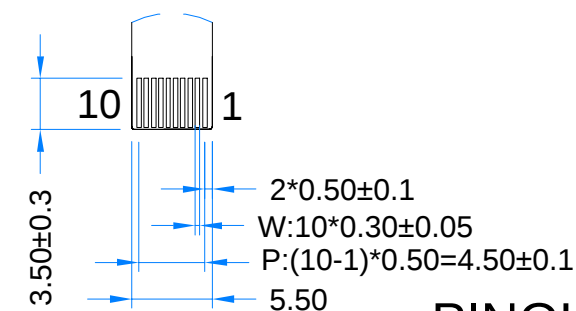

PINOUT ON THE 2ND PAGE

TP NOTES: 1. TP STRUCTURE: G+G 2. CG THICKNESS: 1.8mm 3. SURFACE HARDNESS: 7H 4. DRIVER IC: EXC80W32 5. INTERFACE: USB; I2C; OPTIONAL UART 6. OPERATING VOLTAGE: 3.3V(CTP I2C); 5.0V(CTP USB);	GENERAL NOTES: 1. OPERATING TEMPERATURE: -20°C ~ 70°C 2. STORAGE TEMPERATURE: -30°C ~ 80°C 3. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm 4. RoHS COMPLIANT					
		PN: RVCTP43UE02				
		SN:				
		DRAWN: M.Natywa		2020.08.19	1:1.03	
		CHECKED: Carol Gao			[mm]	
		APPR:			ISO A3	





TOUCH PANNEL CONNECTOR			
Pin No.	Desc.	Pin No.	Desc.
1	USB_GND	6	I2C_VDD(3.3V)
2	USB_VDD(5.0V)	7	I2C_RST
3	USB_D-	8	I2C_SCL
4	USB_D+	9	I2C_INT
5	I2C_GND	10	I2C_SDA/TXD

CN1			
Pin No.	Desc.	Pin No.	Desc.
1	USB_VDD(5.0V)	3	USB_D+
2	USB_D-	4	USB_GND