


Engineering Change Notification

Topic: Display modules with FT8xx chip


We have performed several tests of the audio channel and in certain customer applications the post-filtered audio signal has a very low SNR. As a result of this investigation we now recommend that the audio signal is processed on the customer's PCB.

The audio filter circuitry will now be short circuited from the FT8xx allowing customers to carry out this filtering on their own PCB

ACTUAL AUDIO FILTER CIRCUIT

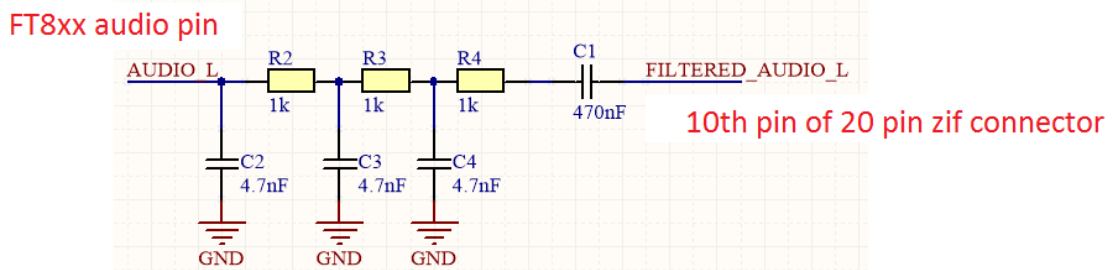

AUDIO FILTER AFTER MODIFICATION

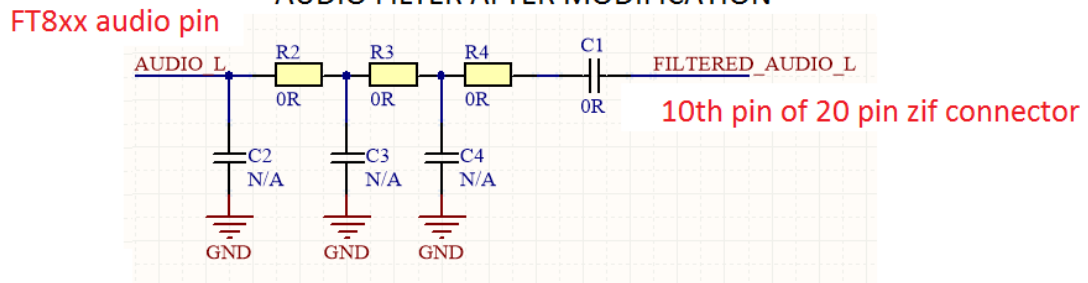

The change will be applied to displays manufactured from the 1st of June 2016.

On request, we will continue to supply the existing panels to support customers using the current filtered signal from the display."

For more information contact us: sales@riverdi.com

